


# Proper Wiring for Heil Microphones and the FLEX5000 Radio's

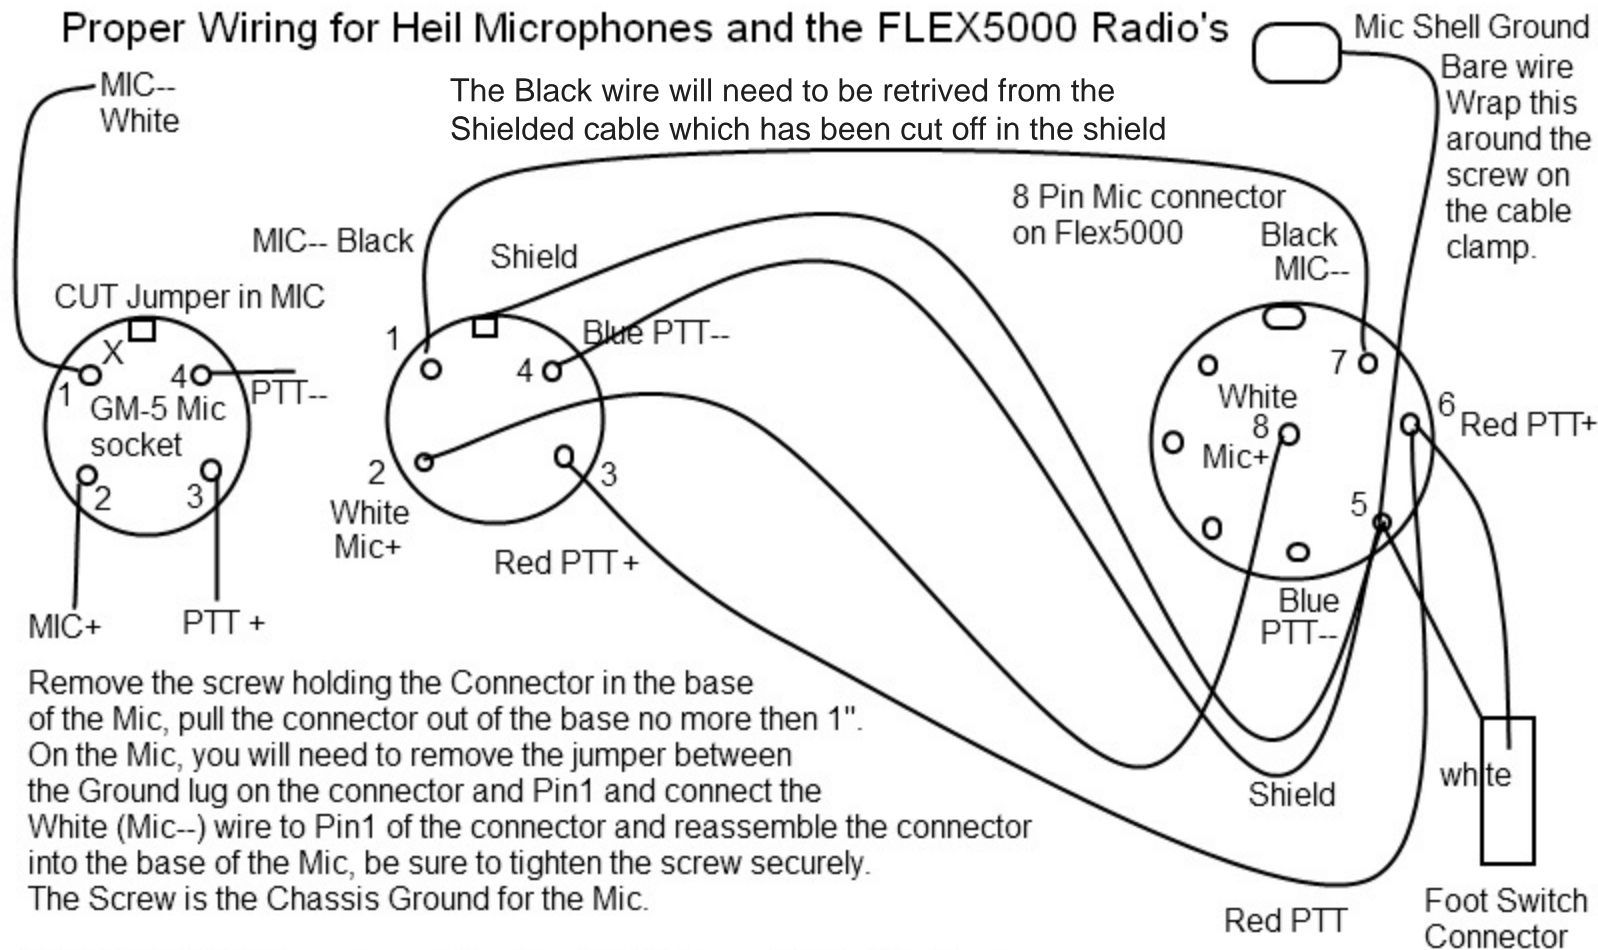

Remove the screw holding the Connector in the base of the Mic, pull the connector out of the base no more than 1". On the Mic, you will need to remove the jumper between the Ground lug on the connector and Pin1 and connect the White (Mic--) wire to Pin1 of the connector and reassemble the connector into the base of the Mic, be sure to tighten the screw securely. The Screw is the Chassis Ground for the Mic.

Heil GM-5, Gold Elite and possible other Heil Mic's and Cable Modifications. Black (MIC--) Wire has been cut off in the Yaesu cables and must be retrieved by cutting and re-doing the cable ends for proper wiring for the FLEX5000 series of Radio's.

This MOD will **Eliminate** the RFI caused by the un-balanced Mic wiring of the original Heil Mic and Yaesu cable wiring commonly used for the FLEX5000.